


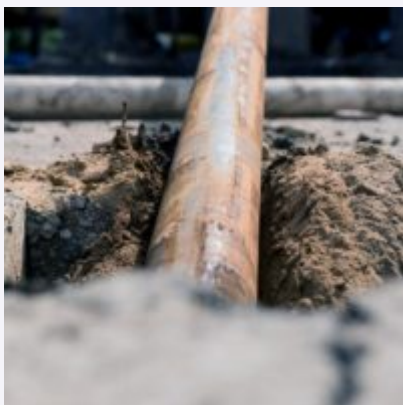

AVENO ECO M 10W-40

AVENO ECO M 10W-40 is a semi-synthetic engine oil with a low coefficient of friction for automotive gasoline and diesel engines with and without turbocharging and direct injection. It is characterized by excellent cold start properties, minimizing fuel consumption, friction of mating parts and their wear. Extended oil change intervals according to manufacturer's instructions.

Instructions for use

AVENO ECO M 10W-40 is ideal for energy-saving, year-round use in modern petrol and diesel engines. Due to the increased TBN value, application with reduced fuel quality is also possible. Follow the operating instructions of the vehicle and engine manufacturers.

Quality classification

Specification

- API SN/CF
- ACEA A3/B4

Recommendation

- MB 229,1

Technical Specifications

Properties	Value	Unit	Testing method
Kinematic viscosity at 40°C	96.7	mm ² /s	DIN ISO 51562-2:1988-12
Kinematic viscosity at 100°C	14.5	mm ² /s	DIN ISO 51562-2:1988-12
Viscosity index	155		ISO 2909:2004-08
Appearance	YELLOW-BROWN		VISUAL
Density at 15°C	863	kg/m ³	DIN EN ISO 12185:1997-11

Pour point	-39	°C	ASTM D 7346:2015
Total Base Number (TBN)	10,5	mgkoh/g	ASTM D 2896:2015